



Disc brush HFB

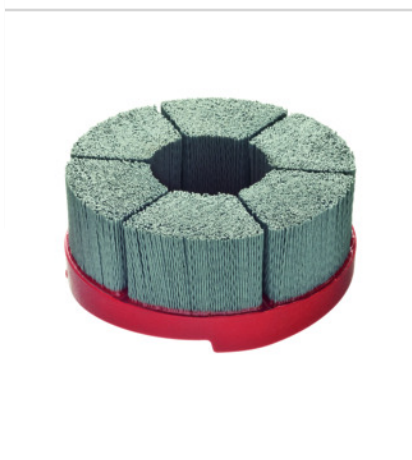

ArtNr. 60432520

HFB disc brushes dense filling (6) dia 125 mm abrasive nylon SIC PA6.12 crimped K120 / 1.10 mm trim length 40 mm bore 27DKN mm



Characteristics

Technical data

Overall Height [GH]	62 mm
Filling Height [H]	40 mm
Grit	K120
Filling Material Diameter	1.10 mm
Bore Diameter [DB]	27DKN mm
Net weight	0.57 kg
Art. Description ERP	HFB disc brushes dense filling (6) dia 125 mm abrasive nylon SIC PA6.12 crimped K120 / 1.10 mm trim length 40 mm bore 27DKN mm
Body Diameter [DK]	125 mm
Body Thickness [KD]	22 mm
Filling Diameter interior free [DIF]	55 mm
RPM max.	3000
Brush Diameter [D]	120 mm
Filling material	SIC PA6.12
Filling Material Shape	Crimped
Arrangement HFB	Full-body (6)
Art. Group	HFB disc brushes

Order information

ArtNr	60432520
EAN	4017359589649
Commodity code	96035000
Packing Unit	1 Stk./pcs./ud.
PEFC	No
Country of origin	D

Marketing

Utilizing Industries	Automotive industry Metalworking industry
Application	Deburring Rounding edges Cleaning
Application Description	The HFB disc brush is used for deburring, rounding edges and cleaning.
Article Description Marketing	Disc brush HFB
On Stock as per Catalogue	Yes
Catalogue Page	152
Product Description short	HFB disc brush with a body diameter of 125 mm, double keyway and 120-grit silicon carbide bristles

Product Description long

The HFB disc brush with silicon carbide bristles is for stationary use in machining centres for deburring, rounding edges, cleaning and planing surfaces. The maximum speed is 3000 RPM. Of premium "Made in Germany" quality, this product is frequently used in the automotive and metalworking industries, and in motor manufacturing.

Keywords

Automotive industry |
Metalworking industry | Deburring
| Rounding edges | Cleaning |
Aluminium | Stainless steel | Steel
| Abrasive filaments | SIC | Disc
brush | HFB

Processed Surface

Aluminium | Stainless steel | Steel

Description

HFB disc brushes

HFB disc brushes from LESSMANN are excellent for deburring and edge rounding on workpieces with flat surfaces. They can achieve high efficiency not only in machining centres, but also in continuous deburring machines with planetary brush systems.