



Single segment brush

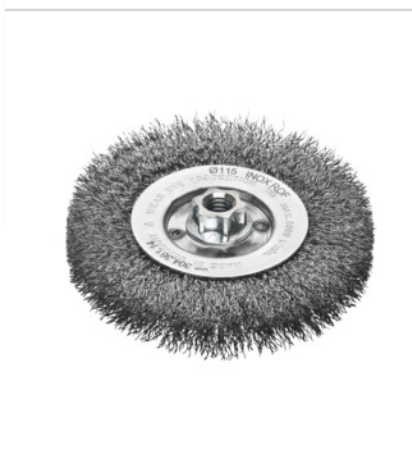

ArtNr. 30436114

Single segment brushes RBE dia 115 x 16-20 mm EBD 12 mm tube 40 mm steel wire stainless ROH crimped 0.30 mm trim length 24 mm thread M14



Characteristics

Technical data

Art. Description ERP	Single segment brushes RBE dia 115 x 16-20 mm EBD 12 mm tube 40 mm steel wire stainless ROH crimped 0.30 mm trim length 24 mm thread M14
Filling Height [H]	24 mm
Filling Material Diameter	0.30 mm
Net weight	0.23 kg
Filling Width [A]	16-20 mm
Number of Rows [RZ]	1
Tube Diameter [R]	40 mm
RPM max.	12500
Brush Diameter [D]	115 mm
Clamping Width Cover Disc [EBD]	12 mm
Clamping Width Tube [EB]	0 in
Clamping Width Tube [EB]	2.4 mm
Filling material	ROH
Filling Material Shape	Crimped
Thread Interior Diameter [GI]	M14
Art. Group	Single segment brushes RBE

Order information

ArtNr	30436114
EAN	4017359307762
Commodity code	96035000
Packing Unit	1 Stk./pcs./ud.
PEFC	No
Country of origin	D

Marketing

Utilizing Industries	Automotive industry Skilled trades Metalworking industry
Application	Removing heat discolouration Deburring Removing paint Derusting Weld seam finishing Cleaning
Application Description	The single segment brush is used for removing heat discolouration, cleaning welds, derusting, removing paint and deburring.
Article Description Marketing	Single segment brush
On Stock as per Catalogue	No
Version	with thread
Catalogue Page	65
Product Description short	Single segment brush with a diameter of 115 mm, M14 thread and stainless steel wire filling

Product Description long	The single segment brush is used to remove rust, paint, etc. and to clean welds. It can be used for light deburring work and to remove the heat discolouration caused by welding stainless steel. The stainless steel brush can be mounted in an angle grinder. The stainless steel filling is suitable for stainless steel and aluminium surfaces. The brush, with its crimped wire and dense filling, ensures smooth and accurate rotary motion. Of premium "Made in Germany" quality, this product is frequently used in industrial companies and the skilled trades for metalworking and in the automotive supply sector.
Keywords	Automotive industry Skilled trades Metalworking industry Removing heat discolouration Deburring Removing paint Derusting Cleaning Weld seam finishing Aluminium Stainless steel Copper Steel Titanium Zinc Stainless steel wire ROF Single segment brush Thread
Processed Surface	Aluminium Stainless steel Copper Titanium Zinc

Description

Single segment brushes

Single segment brushes from LESSMANN typically have a small clamping width and narrower filling width. They are used mainly for deburring work in stationary machines or machining centres. The design of these brushes makes it possible for them to be assembled into wide rollers.

Wheel brushes with thread

Wheel brushes with thread from LESSMANN are ideal for getting into hard-to-reach areas. They usually are used on angle grinders to remove rust and paint or to clean welds. The brush, with its crimped wire and dense filling, ensures smooth and accurate rotary motion.